


THE
GRYPHON



WWW.GRYPHON-AUDIO.COM

THE GRYPHON VANTA DIGITAL 75 Ohm/110 Ohm CABLE SPECIFICATIONS.

1. 2 solid-core 21 AWG Silver-Gold-Technology conductors, twisted in a helix.
2. 2 tubes/insulation of PTFE (Teflon).
3. Binder of stranded Polyester fibres to keep the 2 tubes of PTFE (Teflon) in place and to decrease the mechanical resonances of the Silver-Gold-Technology conductors.
4. Binder of PTFE (Teflon).
5. Tube/insulation of soft and very flexible silicone-based rubber.
6. Braided screen of silver-plated copper wire.
7. Binder of non-woven polyester foil.
8. Jacket/insulation of glossy black Polyurethane for maximum mechanical stability and flexibility.

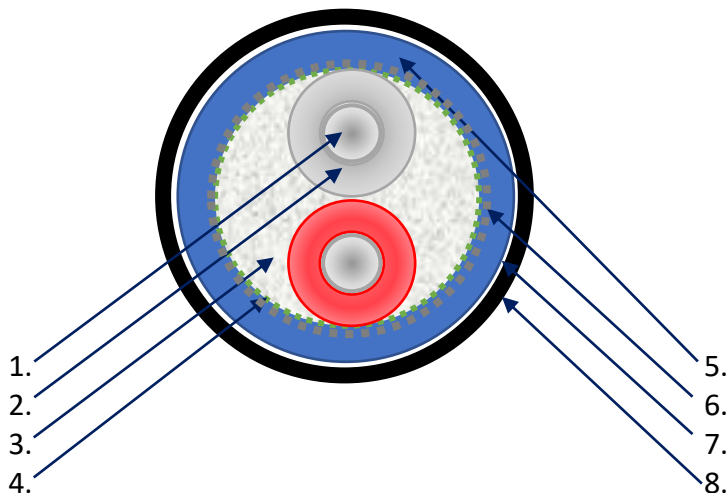

THE GRYPHON VANTA 75 Ohm DIGITAL CABLE SPECS.

- 2 x 21 AWG conductors made from a highly unique Silver-Gold Technology.
- Braided screen of silver plated copper wires.
- Oyaide SLSB 4N Silver BNC connector with Teflon insulation in a specially designed Gryphon housing made from anodized aluminum.
- Special PTFE tube construction.
- PTFE (Teflon) Insulation
- Jacket of glossy Polyurethane for maximum mechanical stability and flexibility.

THE GRYPHON VANTA 110 Ohm DIGITAL CABLE SPECS.

- 2 x 21 AWG conductors made from a highly unique Silver-Gold Technology.
- Braided screen of silver plated copper wires.
- Neutrik Male XLR Connector. Gold plated copper pins with a specially designed Gryphon housing made from anodized aluminum
- Neutrik Female XLR Connector. Connector blades made from deoxidized phosphor bronze plated with gold for optimal contact. Specially designed Gryphon housing made from anodized aluminium.
- Special PTFE tube construction.
- PTFE (Teflon) insulation.
- Jacket of glossy Polyurethane for maximum mechanical stability and flexibility.